


PRINT IP CONFIGURATION REPORT ON IX9

1. Ensure that labels are loaded in the Mailing Machine before printing the report.




2. Press and select **#14 Supervisor**
3. The Login screen is displayed.

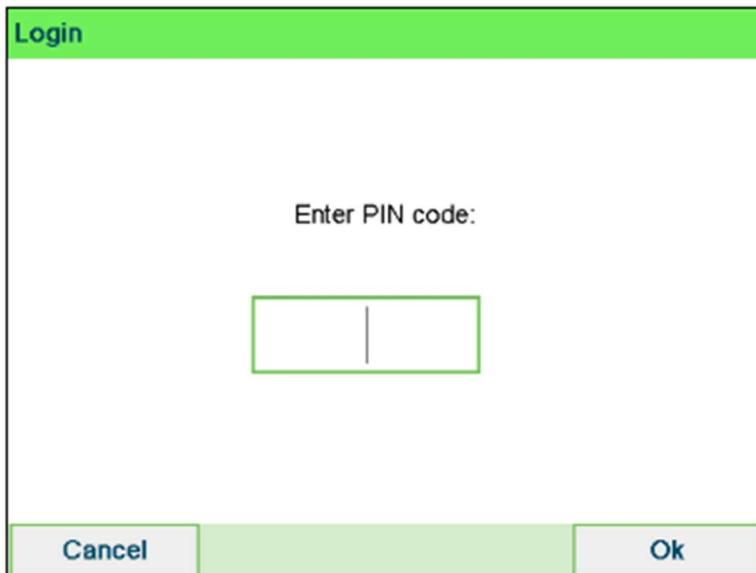

The image shows a 'Login' screen with a green header bar. The main area contains the text 'Enter PIN code:' above a text input field. At the bottom, there are 'Cancel' and 'Ok' buttons.

4. Type the supervisor PIN code 09430 and press [OK].
5. The supervisor Main menu is displayed.

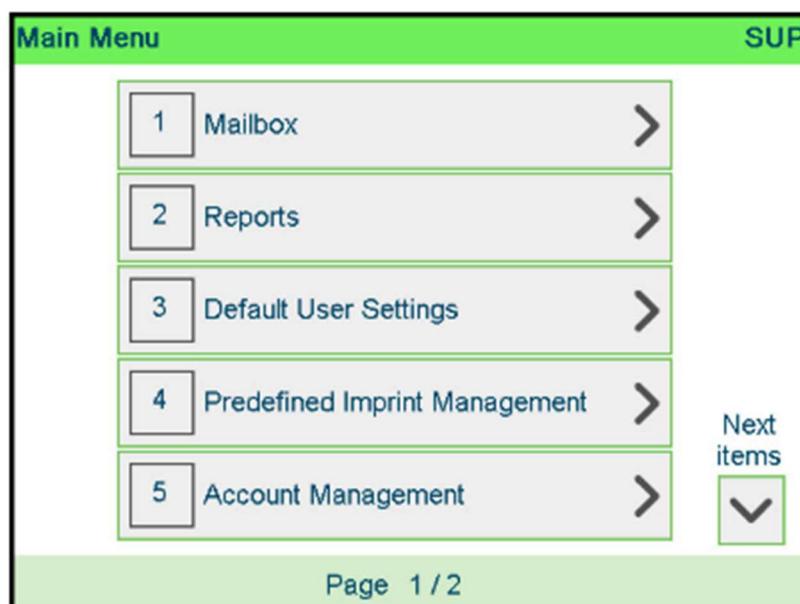

The image shows the 'Main Menu' screen for the supervisor. The menu items are: 1 Mailbox, 2 Reports, 3 Default User Settings, 4 Predefined Imprint Management, and 5 Account Management. A 'Next items' button is located on the right. The screen also shows 'SUP' in the top right corner and 'Page 1 / 2' at the bottom.

6. Select **#2 Reports**

7. Use the arrow keys to navigate until you locate the **IP Configuration Report** and select it.

